

# Selectable Gallonage Fire Nozzle

**Model:QLD5.0/4III**




## Features


- 1) Pattern Identification.
- 2) Hard Anodized Aluminum labels,Laser Engraved.
- 3) Simple to operate (1/4 turn from straight stream to fog)
- 4) Raised lug marks straight stream for limited visibility operations
- 5) Easy to service and repair.
- 6) CCC certificate.
- 7) Compatible with Quick Attach Foam Tube

## Specification



<b>Material</b>	Body	Hard Anodized Aluminum Alloy
	Ball Valve	ABS(standard), Aluminum Alloy/stainless steel (optional)
	Valve Handle	ABS(standard), Aluminum Alloy(optional)
	Pistol Grip	ABS
	Bumper	Rubber
<b>Working pressure</b>	6 bar	
<b>Max. working pressure</b>	10 bar	
<b>Jetting Range</b>	35 meters @ 6 bar	
<b>Max. Fog angle</b>	120°	
<b>Flow Range</b>	60 - 130 - 235 LPM, Flush (15 - 30 - 60 GPM), Four pattern adjustable	
<b>Inlet</b>	2.5 inch, available for Storz,NH,INST,Machino.etc.	

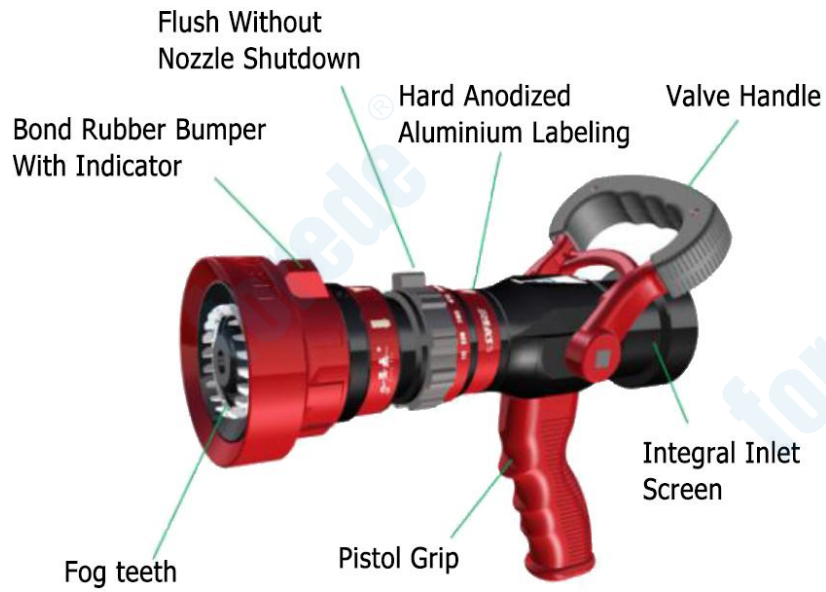

## Dimension

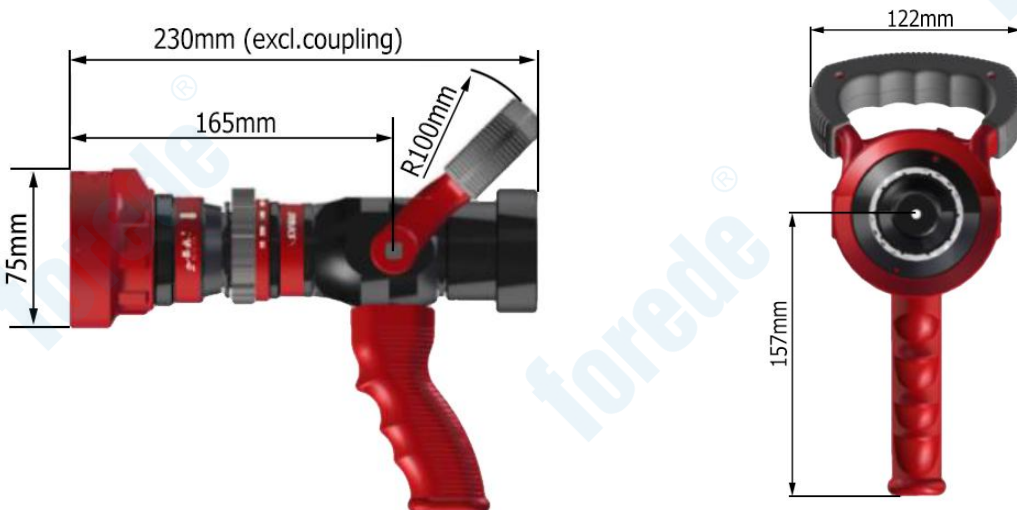

**Operation**

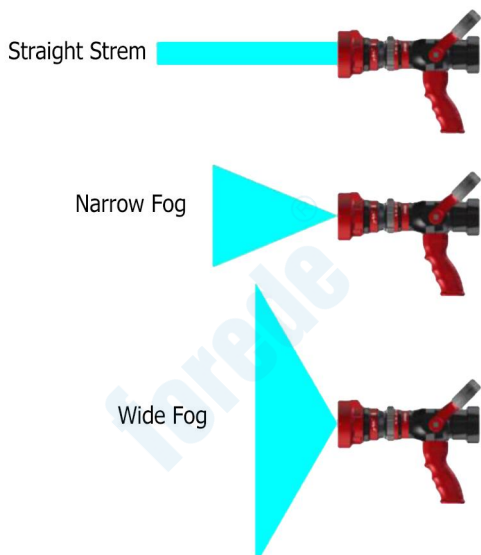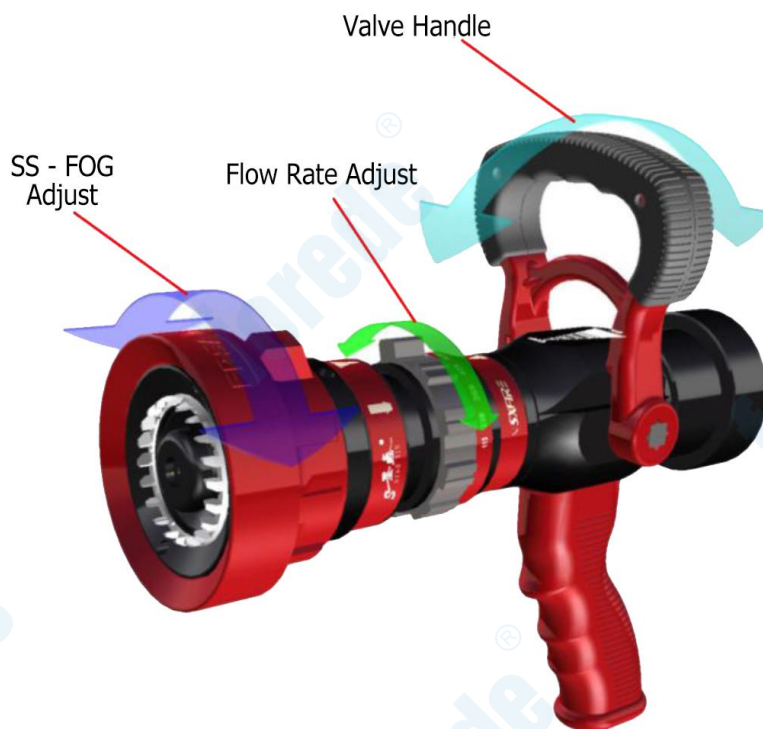

- **Valve Close:** Push the handle forward
- **Valve Open:** Pull the handle backward
- **Flow rate adjust:** Twist the flow adjust ring to obtain required flow rate
- **SS-FOG Pattern:** Twist the rubber bumper